





www.arnscott.com

Loudspeaker Baffles

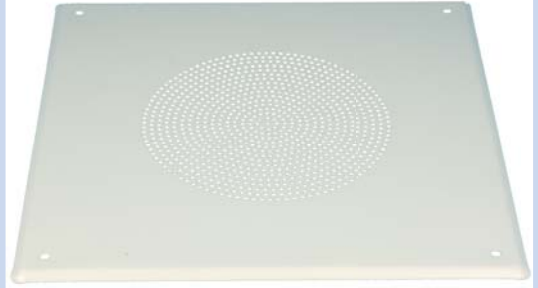


# G25 Series


G25 Series  
Square Acoustic Baffles for 8"  
Loudspeakers



G25W



G25WNS



G25W-NP

## FEATURES

- Powder coat finish is hard wearing and durable
- One piece construction
- Simple to install or retrofit
- Punch-out available for school call switches
- No-Perforation model available for cover or customization purpose
- Some Models approved for ULC™ Listed Fire Alarm Installations

1

M-BF-G25-0002-R-B

Specifications subject to change without notice

www.arnscott.com

sales@arnscott.com

**ARNSCOTT ELECTRONICS INC.**

128 - 2465 Cawthra Rd., Mississauga, ON., Canada L5A 3P2 T. 905.273.9313 F. 905.273.9756



www.arnscott.com

# G25 Series

## Square Acoustic Baffles for 8" Loudspeakers

G25 Series

### SPECIFICATIONS

#### Back-boxes that work with these baffles:

Standard Screw Mount:

E20, SE20SB, E19, E32


Torsion Mount: (Special order, minimum qty applies)

EA20

Note: All models are equipped with welded speaker mounting studs unless otherwise noted.

All baffles can be custom painted to match a particular colour scheme. Send us a colour match and we would be pleased to quote you.

In order to fulfill ULC listing requirements, this baffle must be installed on an Arnscott Fire Rated Speaker Assembly, and used with it's appropriate AEG back-box.

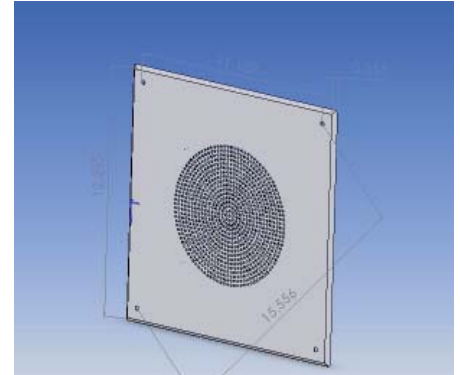

Model No.	Dimention	Mount	Flange Ht.	Spkr Mnt	Material	Finish	ULC Listed Component
Screw Mount:							
G25W	12-1/2"	11"	3/16"	weld studs	20 GA CRS	White Powder	Yes
G25WNS	12-1/2"	11"	3/16"	weld studs	20 GA CRS	White Powder	No
G25W-NP	12-1/2"	11"	3/16"	weld studs	20 GA CRS	White Powder	No
Torsion Mount: (Minimun qty applies, this is a special order product)							
GA25W	12-1/2"	N/A	3/16"	weld studs	20 GA CRS	White Powder	No

### ARCHITECTS AND ENGINEERS SPECIFICATIONS

#### MODEL G25W / G25WNS / G25W-NP

The flush ceiling baffle shall be an ARNSCOTT Model G25W / G25WNS / G25W-NP. The baffle shall be fabricated from one piece of steel, 20 Gauge, finished in semi-gloss white powder paint and shall measure 31.8cm (12-1/2") square and 0.5cm (3/16") deep. The 8-inch loudspeaker shall mount on concealed studs. Four holes shall be provided to mount the baffle to ARNSCOTT Model E20, SE20SB, E19, E32, recessed enclosures. Model G25WNS has an additional rectangular slot punched to facilitate AEG Model CS1 call switch for the school market. The G25W-NP is supplied without the speaker perforations punched, and can be used as a cover.

#### MODEL GA25W

The flush ceiling baffle shall be an ARNSCOTT Model GA25W. The baffle shall be fabricated from one piece of steel, finished in semi-gloss white powder paint and shall measure 31.8cm (12-1/2") square and 0.5cm (3/16") deep. The 8-inch loudspeaker shall mount on concealed studs. Concealed torsion springs shall be provided to mount the baffle to ARNSCOTT Model EA20, both of these items are special ordered, and require minimum qty.

ULC is a Trademark of Underwriters Laboratories of Canada

Specifications subject to change without notice

www.arnscott.com

sales@arnscott.com