



DSW, DW, AT, CM Series

70/25 Volt Audio Attenuators

Wiring Instructions

www.arnscott.com


Install # I-CT-AT
Revision # -0001-R.G



DSW Series




DW Series

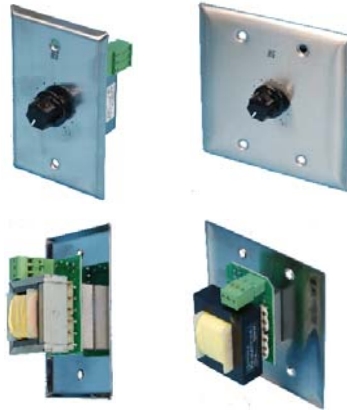

AT Series



CM Series

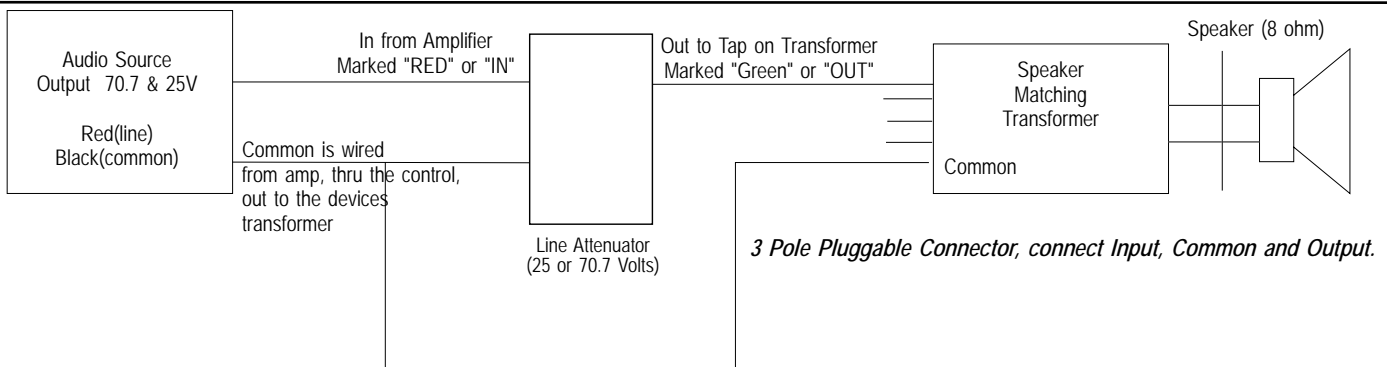

Wiring Instructions:

All AEG Standard attenuators without over-ride wire the same way. There is an input, an output, and a common. The Input comes from the constant voltage amplifier (70/25/100 Volt), the output leaves the attenuator and heads off to the speaker line matching transformer power tap. The Common goes from the amp, to the attenuator, and from there to the Common tap on the speaker line matching transformer.

Watch the load on the attenuator. If the attenuator is rated for 10 watts, then the load attached to it should be no greater than 10 watts.

The models equipped with pluggable connectors can be prewired at the site using only the pluggable portion, then the control installed later after painting is finished. Units equipped with wires are connected the same way as the pluggable units, however the red is the input, the green is the output, and the black wire is the common.

Note: Specifications are subject to change without notice.



A Division of Arnscott Electronics Inc.
211 Smith Street, Arthur, Ontario, Canada, N0G 1A0

Phone:(519) 848-1100
Fax: (519) 848-1101
www.arnscott.com
sales@arnscott.com