




www.arnscott.com

Loudspeaker Baffles

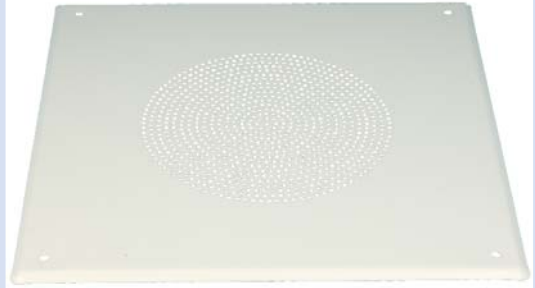

G25 Series


G25 Series
Square Acoustic Baffles for 8"
Loudspeakers

FEATURES

- Powder coat finish is hard wearing and durable
- One piece construction
- Simple to install or retrofit
- Punch-out available for school call switches
- No-Perforation model available for cover or customization purpose
- Some Models approved as a part for ULC™ Listed Fire Alarm Installations



G25W



G25WNS



G25W-NP

1

M-BF-G25-0002-R-B

Specifications subject to change without notice

www.arnscott.com

sales@arnscott.com

ARNSCOTT ELECTRONICS INC.

211 Smith Street, Arthur, ON., Canada N0G 1A0 T. 519-848-1100 F. 519-848-1100



www.arnscott.com

G25 Series

Square Acoustic Baffles for 8" Loudspeakers

G25 Series

SPECIFICATIONS

Back-boxes that work with these baffles:

Standard Screw Mount:

E20, SE20SB, E19, E32


Torsion Mount: (Special order, minimum qty applies)

EA20

Note: All models are equipped with welded speaker mounting studs unless otherwise noted.

All baffles can be custom painted to match a particular colour scheme. Send us a colour match and we would be pleased to quote you.

In order to fulfill ULC listing requirements, this baffle must be installed on an Arnscott Fire Rated Speaker Assembly, and used with it's appropriate AEG back-box.

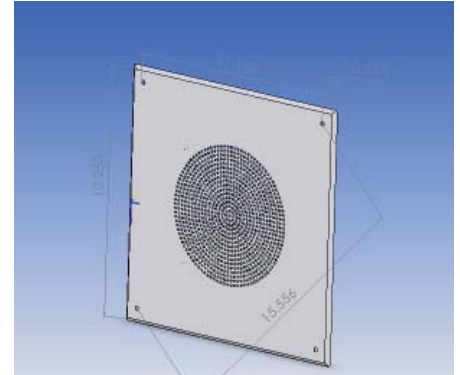

| Model No. | Dimention | Mount | Flange Ht. | Spkr Mnt | Material | Finish | ULC Listed Component |
|---|-----------|-------|------------|------------|-----------|--------------|----------------------|
| Screw Mount: | | | | | | | |
| G25W | 12-1/2" | 11" | 3/16" | weld studs | 20 GA CRS | White Powder | Yes |
| G25WNS | 12-1/2" | 11" | 3/16" | weld studs | 20 GA CRS | White Powder | No |
| G25W-NP | 12-1/2" | 11" | 3/16" | weld studs | 20 GA CRS | White Powder | No |
| Torsion Mount: (Minimun qty applies, this is a special order product) | | | | | | | |
| GA25W | 12-1/2" | N/A | 3/16" | weld studs | 20 GA CRS | White Powder | No |

ARCHITECTS AND ENGINEERS SPECIFICATIONS

MODEL G25W / G25WNS / G25W-NP

The flush ceiling baffle shall be an ARNSCOTT Model G25W / G25WNS / G25W-NP. The baffle shall be fabricated from one piece of steel, 20 Gauge , finished in semi-gloss white powder paint and shall measure 31.8cm (12-1/2") square and 0.5cm (3/16") deep. The 8-inch loudspeaker shall mount on concealed studs. Four holes shall be provided to mount the baffle to ARNSCOTT Model E20, SE20SB, E19, E32, recessed enclosures. Model G25WNS has an additional rectangular slot punched to facilitate AEG Model CS1 call switch for the school market. The G25W-NP is supplied without the speaker perforations punched, and can be used as a cover.

MODEL GA25W

The flush ceiling baffle shall be an ARNSCOTT Model GA25W. The baffle shall be fabricated from one piece of steel, finished in semi-gloss white powder paint and shall measure 31.8cm (12-1/2") square and 0.5cm (3/16") deep. The 8-inch loudspeaker shall mount on concealed studs. Concealed torsion springs shall be provided to mount the baffle to ARNSCOTT Model EA20, both of these items are special ordered, and require minimum qty.

ULC is a Trademark of Underwriters Laboratories of Canada